



professional security

19" LED Monitor



19" LED Monitor

SMT-1934

- Supports up to 1280 x 1024 resolution, 4:3 display
- Superior image quality DNIe (Digital Natural Image engine)
- High contrast ratio 1000:1
- 120Hz processing smooth judder in motion
- Fast response time 5ms
- Durable tempered glass screen

19" LED Monitor

SMT-1934




Specifications

SMT-1934		
Display		
Type		LED
Screen Size		19"
Brightness		250cd/m ²
Max. Resolution	VGA(D-SUB)	1,280 x 1,024
	BNC(CVBS)	600TVL
Contrast Ratio		1,000 : 1
Aspect Ratio		4 : 3
Viewing Angle (H/V)		170° / 160°
Display Color		16.7million
Response Time		5ms
Video System		NTSC / PAL
Panel Life		30,000 hours
Filter Type		3D combfilter
Interface		
Video Connector		BNC types (2 in / 2 out)
RGB Connector		1 Analogue RGB 15-pin D-sub
Input Signal		0.7 Vp-p ±5%
HDMI Connector		1 HDMI input (Type A connector)
Audio Connector		2 RCA type (2 Stereo inputs)
Output Signal		Speakers : 2 x 1W
Application Support		
On Screen Display		Remote controller
Functions		
		VESA™ DPM compatible
Language		
		English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean
General		
Electrical		
Input Voltage		AC 100 ~ 240V (50/60Hz)
Power Consumption		Max. 35W
Environmental		
Operating Temperature		0 ~ +40°C (+32°F ~ +104°F)
Humidity		20% ~ 90% (Non-condensing)
Mechanical		
Dimensions with Stand (WxHxD)		412 x 406.5mm x 217.4mm (16.22"x 16" x 8.56")
Dimensions without Stand (WxHxD)		412 x 347 x 59.4mm (16.22"x 13.66" x 2.34")
Weight		5 kg (11.02lb)
LCD Protection Glass		Yes
Cabinet Color		Black
VESA Mounts Interface		100 x 100mm

Dimensions

Unit : mm (inch)

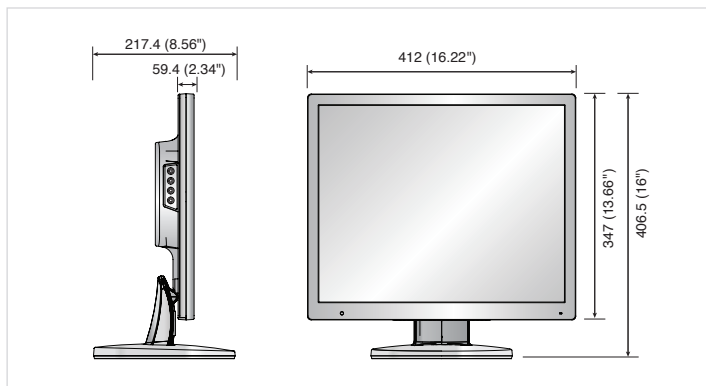

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

