

DS-2CD2685FWD-IZS  
8 MP IR Vari-focal Bullet Network Camera



### Key Features

- 1/2.5" Progressive Scan CMOS
- 3840 × 2160 @20fps
- H.265, H.265+
- 120dB WDR
- IP67, IK10
- IR range: up to 50 m
- BLC/3D DNR/ROI/HLC
- Smart encoding: Support low bit rate, low latency
- 4 behavior analyses and face detection
- Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR  
Color: 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR



## Specifications


| <b>Camera</b>               |  |
|-----------------------------|--|
| Image Sensor                | 1/2.5" Progressive Scan CMOS   |
| Min. Illumination           | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR<br>Color: 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR  |
| Shutter Speed               | 1/3 s to 1/100,000 s   |
| Slow Shutter                | Yes  |
| Day & Night                 | IR Cut Filter  |
| Digital Noise Reduction     | 3D DNR   |
| WDR                         | 120dB  |
| 3-Axis Adjustment           | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°   |
| <b>Lens</b>                 |  |
| Focal length                | 2.8 to 12 mm   |
| Aperture                    | F1.4   |
| Focus                       | Auto   |
| FOV                         | Horizontal field of view: 115° to 35°<br>Vertical field of view: 60° to 19°<br>Diagonal field of view: 146° to 38.5°   |
| Lens Mount                  | Φ14  |
| <b>IR</b>                   |  |
| IR Range                    | Up to 50 m   |
| Wavelength                  | 850nm  |
| <b>Compression Standard</b> |  |
| Video Compression           | Main stream: H.265/H.264<br>Sub stream: H.265/H.264/MJPEG<br>Third stream: H.265/H.264   |
| H.264 Type                  | Main Profile/High Profile  |
| H.264+                      | Main stream supports   |
| H.265 Type                  | Main Profile   |
| H.265+                      | Main stream supports   |
| Video Bit Rate              | 32 Kbps to 16 Mbps   |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM  |
| Audio Bit Rate              | 64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)  |
| <b>Smart Feature-set</b>    |  |
| Behavior Analysis           | Line crossing detection, intrusion detection, unattended baggage detection, object removal detection   |
| Exception Detection         | Scene change detection   |
| Face Detection              | Yes  |
| Region of Interest          | Support 1 fixed region for main stream and sub stream  |
| <b>Image</b>                |  |
| Max. Resolution             | 3840 × 2160  |
| Main Stream                 | 50Hz: 20 fps (3840 × 2160), 25 fps (3072 × 1728, 2560 × 1440, 1920 × 1080, 1280 × 720)<br>60Hz: 20 fps (3840 × 2160), 30 fps (3072 × 1728, 2560 × 1440, 1920 × 1080, 1280 × 720) |
| Sub Stream                  | 50Hz: 25fps (640 × 480, 640 × 360, 320 × 240)<br>60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)   |

|                               |   |
|-------------------------------|---|
| Third Stream                  | 50Hz: 25fps (1280 × 720, 640 × 360, 352 × 288)<br>60Hz: 30fps (1280 × 720, 640 × 360, 352 × 240)  |
| Image Enhancement             | BLC/3D DNR/HLC  |
| Image Setting                 | Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or web browser                                       |
| Day/Night Switch              | Day/Night/Auto/Schedule/Triggered by Alarm In   |
| <b>Network</b>                |   |
| Network Storage               | Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR   |
| Alarm Trigger                 | Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error, Alarm output, Alarm input |
| Protocols                     | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour            |
| General Function              | One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter                      |
| Firmware Version              | V5.5.52   |
| API                           | ONVIF (PROFILE S, PROFILE G), ISAPI   |
| Simultaneous Live View        | Up to 6 channels  |
| User/Host                     | Up to 32 users<br>3 levels: Administrator, Operator and User  |
| Client                        | iVMS-4200, Hik-Connect, iVMS-5200   |
| Web Browser                   | IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+  |
| <b>Interface</b>              |   |
| Audio                         | 1 input (line in, 3.5 mm), 1 output(3.5 mm), mono sound   |
| Communication Interface       | 1 RJ45 10M/100M self-adaptive Ethernet port   |
| Alarm                         | 1 input, 1 output (max. 12 VDC, 30 mA)  |
| Video Output                  | 1Vp-p composite output (75 Ω/BNC) (For adjustment only)   |
| On-board storage              | Built-in Micro SD/SDHC/SDXC slot, up to 128 GB  |
| SVC                           | Support H.264 and H.265 encoding  |
| Reset Button                  | Yes   |
| <b>Audio</b>                  |   |
| Environment Noise Filtering   | Yes   |
| Audio Sampling Rate           | 8kHz/16kHz/32kHz/44.1kHz/48kHz  |
| <b>General</b>                |   |
| Operating Conditions          | -30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)   |
| Power Supply                  | 12 VDC ± 25%, PoE (802.3at)<br>Terminal block for DC input  |
| Power Consumption and Current | 12 VDC, 1.5A, max. 17W<br>PoE (802.3at, 42.5V to 57V), 0.5A to 0.1A, max. 19W   |
| Protection Level              | IP67, IK10  |
| Material                      | Metal   |
| Dimensions                    | Φ144.13×332.73 mm (Φ5.67"× 13.10")  |
| Weight                        | Camera: 1893 g (4.17 lb.)   |

## Available Model:

DS-2CD2685FWD-IZS

## Dimensions

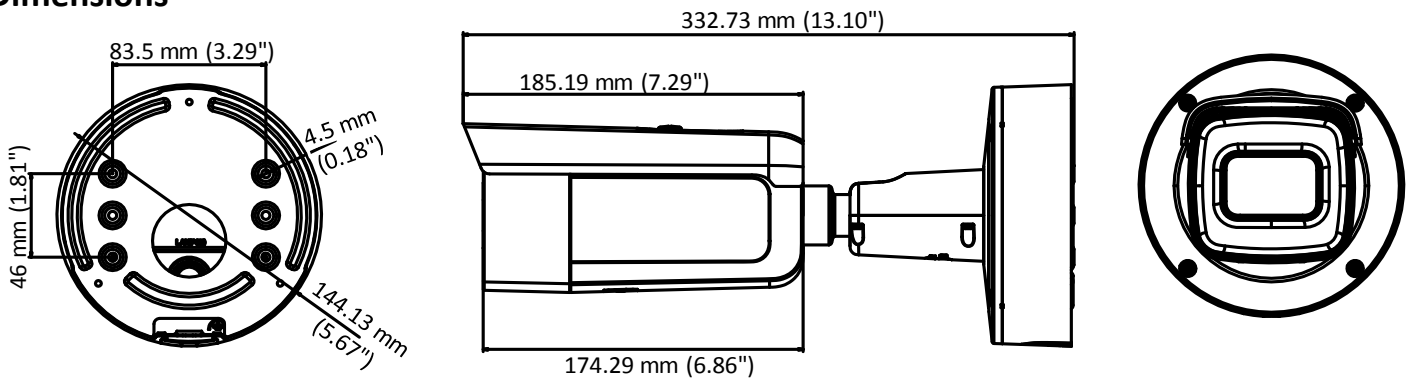

## Accessories



DS-1475ZJ-SUS

Vertical Pole Mount



DS-1476ZJ-SUS

Corner Mount

05055220180619

**CCTV**Ireland.ie

Find us on 

Find us on Facebook

We are Official HIKVision Partners

**HIKVISION** SILVER PARTNER