

DS-3E0510P-E 8-Port Gigabit Unmanaged PoE Switch

DS-3E0510P-E switches are layer 2 Gigabit PoE unmanaged switches, providing 8 Gigabit PoE ports, one 10/100/1000 Mbps RJ45 port, and one 10/100/1000 Mbps SFP fiber optical port. The switches provide advanced PoE technology and connect other devices with high performance. Meanwhile, all Gigabit ports guarantee stable transmission of data.



Feature and Function

- 8 × Gigabit PoE ports, 1 × Gigabit RJ45 port, and 1 × Gigabit SFP fiber optical port.
- IEEE 802.3at/af standard.
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z standard.
- 6 KV surge protection for PoE ports.
- PoE power management.
- Gigabit network access.
- Wire-speed forwarding and non-blocking design.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.




Specification

| | | |
|--------------------|---------------------------|--|
| Model | | DS-3E0510P-E |
| Network parameters | Port number | 8 × Gigabit PoE ports, 1 × Gigabit RJ45 port, and 1 × Gigabit SFP fiber optical port |
| | Port type | RJ45 port, full duplex, MDI/MDI-X adaptive |
| | Standard | IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, IEEE 802.3z |
| | Forwarding mode | Store-and-forward switching |
| | MAC address table | 4 K |
| | Switching capacity | 20 Gbps |
| | Packet forwarding rate | 14.88 Mpps |
| | Internal cache | 1.5 Mbits |
| PoE power supply | PoE standard | IEEE 802.3af, IEEE 802.3at |
| | PoE power pin | Support 4-core power supply, and Ethernet cable 1/2/3/6 provide power supply. |
| | PoE port | Ports 1 to 8 |
| | Max. port power | 30 W |
| | PoE power budget | 110 W |
| | Max. power consumption | 120 W |
| General | Shell | Metal material, fan-free design |
| | Gross weight | 1.4 kg (3.09 lb) |
| | Net weight | 0.6 kg (1.32 lb) |
| | Dimension (L × H × D) | 217.6 mm × 27.8 mm × 108.55 mm (8.6" × 1.1" × 4.3") |
| | Operating temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| | Storage temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| | Operating humidity | 5% to 95% (no condensation) |
| | Storage humidity | 5% to 95% (no condensation) |
| | Power supply | 48 VDC, 2.5 A |
| | Power consumption in idle | 10 W |

Physical Interface

Front panel:

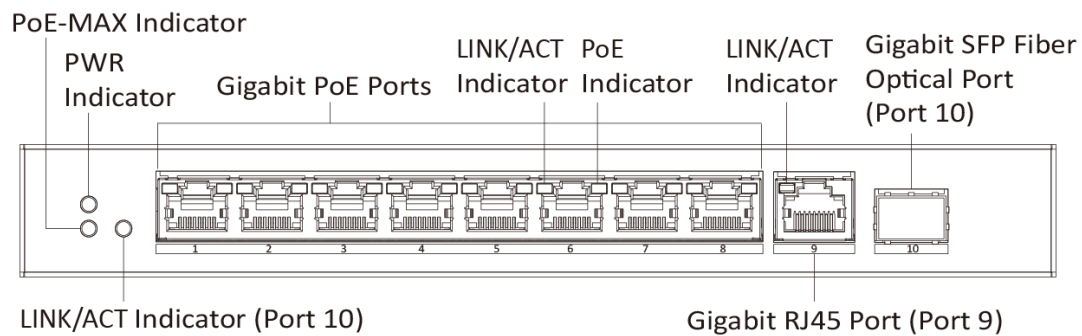

Back panel:



Available Model

- DS-3E0510P-E



Optional Accessory

| SFP Module | Fiber type | Connector | Date Rate | Wavelength | Distance |
|-------------------------|---------------------------|-----------|-----------|-------------------|------------|
| HK-SFP-1.25G-20-1310 | Single fiber, Single-mode | LC | 1250 Mbps | Tx1310nm/Rx1550nm | 0 to 20 km |
| HK-SFP-1.25G-20-1550 | Single fiber, Single-mode | LC | 1250 Mbps | Tx1550nm/Rx1310nm | 0 to 20 km |
| HK-SFP-1.25G-1310-DF-MM | Duplex fiber, Multi-mode | LC | 1250 Mbps | Tx1310nm/Rx1310nm | 0 to 1 km |
| HK-SFP-1.25G-20-1310-DF | Duplex fiber, Single-mode | LC | 1250 Mbps | Tx1310nm/Rx1310nm | 0 to 20 km |


i NOTE

HK-SFP-1.25G-20-1310 has to work with HK-SFP-1.25G-20-1550 as a pair.

Dimension (unit: mm)

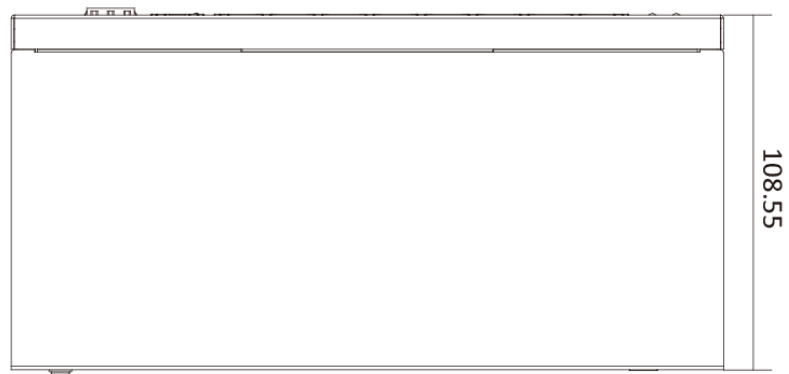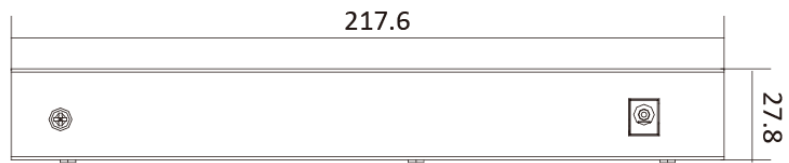

Typical Application

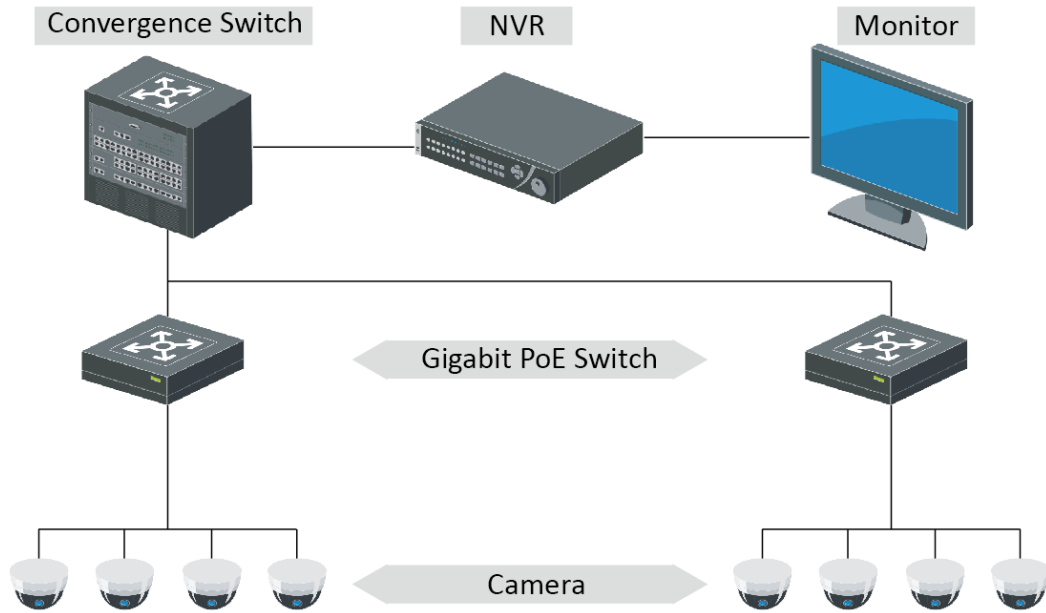

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com